

LAQUA UNIGRIP

l'alleato perfetto per ogni supporto

Fondo idrodiluibile colorabile dall'innovativa tecnologia

PVC

FERRO

LEGNO

LAMIERA ZINCATA

VETRO

SOLUZIONE UNIVERSALE
AD ALTE PRESTAZIONI:
POTERE ANTICORROSIVO SU
METALLI, PROTEZIONE ED
ANCORAGGIO SU PLASTICA,
LEGNO E ALTRI SUPPORTI.



Prodotto versatile, con possibile
impiego come fondo-finitura
in tinte selezionate,
per cicli completi all'acqua
o sovrapplicabile con Syntex HP.

Pronto all'uso
nelle versioni
BIANCO LQ260301
e GRIGIO LQ260302
da 0,75L e 3L

PREPARAZIONE DEI SUPPORTI

Superfici Nuove:

Il supporto deve essere pulito, asciutto e privo
di contaminanti. Carteggiare e applicare
una o due mani di prodotto, poi la finitura.
Se usato come primer su legno, diluire la prima mano
del 5-10%, carteggiare e applicare
una seconda mano, quindi la finitura.

Superfici già Verniciate:

Rimuovere la pittura non aderente.
La superficie deve essere pulita e asciutta.
Applicare una o due mani di prodotto
e, una volta asciutto, procedere con la finitura.
Per ulteriori indicazioni consultare la scheda tecnica.


CARATTERISTICHE PRINCIPALI

- Adatto per tutti i supporti
- Anticorrosivo e protettivo
- Sovraverniciabile da smalti a solvente e all'acqua
- Eccezionale adesione e resistenza
- Facile applicazione
- Ideale per ambienti interni ed esterni
- Tinteggiabile a tintometro come sottotinta
- Colorabile come fondo-finitura


MODALITÀ
APPLICATIVE
E PREPARAZIONE
DEL PRODOTTO



Sottotinte della cartella White Soul suggerite da Lechler Map in base al colore finale da realizzare

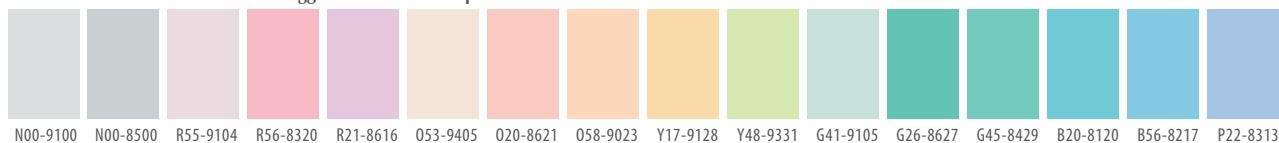

Colori indicati su Lechler Map come fondo-finitura per TUTTI i supporti



LAQUA UNIGRIP

the perfect partner for every substrate

Water-thinnable and colourable primer filler with innovative technology

PVC

IRON

WOOD

GALVANISED STEEL SHEET

GLASS

HIGH-PERFORMANCE
UNIVERSAL SOLUTION:
ANTICORROSIVE POWER
ON METALS, PROTECTION
AND ADHESION ON
PLASTIC, WOOD AND OTHER
SUBSTRATES.



Versatile product with possible
use as a primer filler-finish in
selected colours, for complete
water-borne painting processes
or overcoatable with Syntex HP.

Ready for use
in the versions
WHITE LQ260301
and GREY LQ260302
in 0,75L and 3L

SUBSTRATE PREPARATION

New surfaces:

The substrate must be clean, dry and free from polluting agents. Sand and apply one or two coats of product, then the finish. If used as a primer on wood, thin the first coat by 5-10%, sand and apply a second coat, then the finish.

Coated surfaces:

Remove non-cohesive paint.
The surface must be clean and dry.
Apply one or two coats of product and, once it has dried, proceed with the finish.
For further indications consult the technical data sheet.


MAIN CHARACTERISTICS

- Suitable for all substrates
- Anticorrosive and protective
- Overcoatable with solvent-based and water-based enamels
- Excellent adhesion and resistance
- Ease of application
- Ideal for interior and exterior environments
- Colourable by tinting machine as an undercoat
- Colourable as a primer filler-finish

APPLICATION
MODES AND
PRODUCT
PREPARATION



Undercoats from the White Soul colour chart recommended by Lechler Map according to the final colour to obtain

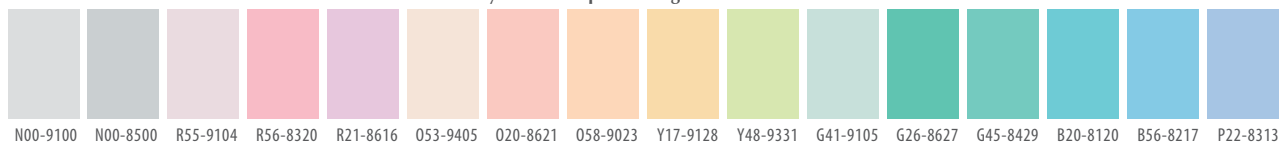

Colours available on Lechler Map as a primer filler-finish for ALL substrates

